


XLR PLUG --DAN, DAF, DAH, DAL series

Professional microphones/connectors, design and manufacture.

Product Introduction:

Produced to international standards, the robust and compact series of Sound Plug XLR is universally compatible and can be easily assembled without set screws.

COMPONENT :

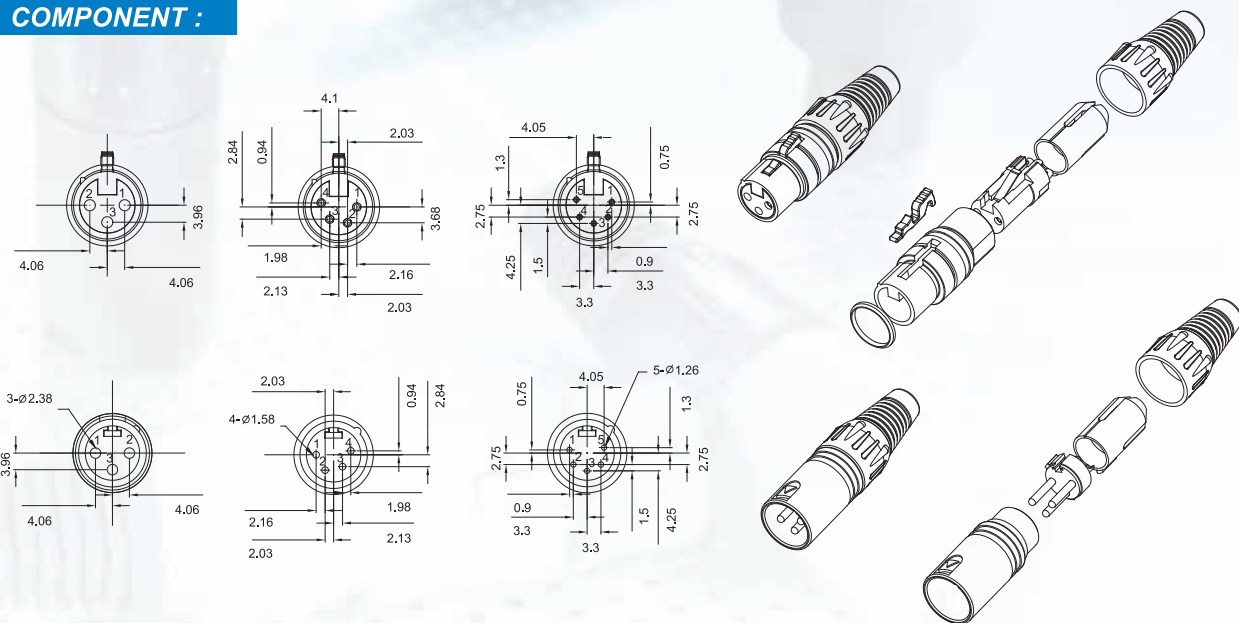

ORDER CODE:


DAN	(Contact)	(Type)	(Contact color)	(Cap Color)
	PIN Q"TY			
		MALE/FEMALE STYLE F:FEMALE M:MALE	N/A:NICKEL G:GOLD S:SILVER	N/A:BLACK U:BLUE R:RED G:GREEN Y:GREY P:PURPLE

EX. DAN-3F-G-B

3 PIN FEMALE CONNECTOR/GOLD CONTACT/BLACK COLOR




DAN-F XLR Female connector, cable, 3~5 pins.



▲ DAN-F ▲ DAN-FM ▲ DAN-BF, DAN-PBF

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
DAN-(*)F	FEMALE,NICKEL	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)FM	FEMALE,NICKEL	NICKEL/GOLD	METAL/BLACK	3P-5P
DAN-(*)BF	FEMALE,BLACK CHROME PLATED	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)PBF	FEMALE,MATTE BLACK PAINTED	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)TF	FEMALE,SATIN CHROME	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)TFM	FEMALE,SATIN CHROME	NICKEL/GOLD	METAL/BLACK	3P-5P


★ XLR female connector, cable type, 3-5 pins with lock ring.
Also available for microphone and gooseneck assemblies.



▲ DAN-SF

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
DAN-(*)SF	FEMALE,BLACK CHROME PLATED /LOCK RING	NICKEL/GOLD	BLACK	3P-5P

DAN-M XLR Male connector, cable type, 3~5 pins.




▲ DAN-M ▲ DAN-MM ▲ DAN-BM, DAN-PBMF

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
DAN-(*)M	MALE,NICKEL	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)MM	MALE,NICKEL	NICKEL/GOLD	METAL/BLACK	3P-5P
DAN-(*)BM	MALE,BLACK CHROME PLATED	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)PBM	MALE,MATTE BLACK PAINTED	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)TM	MALE,SATIN CHROME PLATED	NICKEL/GOLD	BLACK/BLUE/RED/GREEN/GREY/PURPLE	3P-5P
DAN-(*)TMM	MALE,SATIN CHROME PLATED	NICKEL/GOLD	METAL/BLACK	3P-5P


DAL



▲ DAL-F

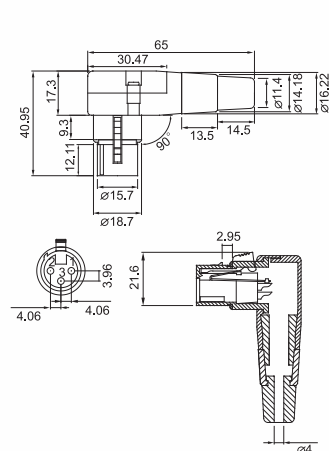

▲ DAL-M

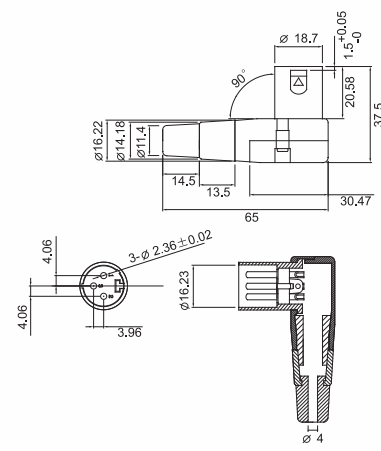

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
DAL-(*)F	FEMALE, NICKEL PLATED /RIGHT ANGLE	NICKEL	BLACK	3P
DAL-(*)BF	FEMALE, BLACK CHROME PLATED/RIGHT ANGLE	NICKEL	BLACK	3P
DAL-(*)M	MALE, NICKEL PLATED/RIGHT ANGLE	NICKEL	BLACK	3P
DAL-(*)BM	MALE, BLACK CHROME PLATED/RIGHT ANGLE	NICKEL	BLACK	3P

XLR-DAN Electrical

ITEM	3P	4P	5P
Contact Resistance	< 3m Ohm	< 3m Ohm	< 3m Ohm
Insulation Resistance	> 2G Ohm (Hi-Temp. & Moisture Environment > 1G Ohm)	> 2G Ohm (Hi-Temp. & Moisture Environment > 1G Ohm)	> 2G Ohm (Hi-Temp. & Moisture Environment > 1G Ohm)
Dielectric Strength	1500 Dcv	1500 Dcv	1500 Dcv
Rated Current	16A	10A	10A
Capacitance Between Contacts	≤ 4 Pf	≤ 7Pf	≤ 7Pf
Awg	2.5Mm /14Awg	1.5Mm /16Awg	1.0Mm /18Awg

XLR-DAN Mechanical

ITEM	3P/4P/5P standard	3P/4P/5P exceptional
Lifetime/Insert & Withdraw	>1000 Cycles	>1000 Cycles
Insertion/Withdrawal Force	≤ 20N	≤ 20N
Cable O.D. Range	2.5Mm -8.0Mm	10Mm /Max.


XLR-DAN Material

PART	DAN-F, DAN-M	DAN-TF, DAN-TM	DAN-PBF, DAN-PBM	DAN-BF, DAN-BM
Part	Nickel Plated (3P/4P/5P)	Satin Chrome Plated (3P/4P/5P)	Matte Black Painted (3P/4P/5P)	Black Chrome Plated (3P/4P/5P)
Shell	Zna4Cu1/Nickel Plated	Zna4Cu1/Satin Chrome Plated	Zna4Cu1/Matte Black Painted	Zna4Cu1/Black Chrome Plated
Insert	P.B.T -Black	P.B.T -Black	P.B.T -Black	P.B.T -Black
Contact	Female:Bronze-C5210P Male:Brass-C3604	Female:Bronze-C5210P Male:Brass-C3604	Female:Bronze-C5210P Male:Brass-C3604	Female:Bronze-C5210P Male:Brass-C3604
Contact surface	Nickel/silver/gold plated	Nickel/silver/gold plated	Nickel/Silver/Gold Plated	Nickel/Silver/Gold Plated
Ground Contact	Female:SUS-301 Male: Bronze-C5210P Nickel Plated	Female:SUS-301 Male: Bronze-C5210P Nickel Plated	Female:SUS-301 Male: Bronze-C5210P Nickel Plated	Female:SUS-301 Male: Bronze-C5210P Nickel Plated
Relief clamp	POM-Black	POM-Black	POM-Black	POM-Black
Antikink bushing	PA+TPR-Black or Bronze/ Nickel Plated+TPR	PA+TPR-Black or Bronze/ Satin Chrome Plated+TPR	PA+TPR-Black or Bronze/ Matte Black Plated +TPR	PA+TPR-Black or Bronze/ Black Chrome Plated+TPR


DAF



▲ DAF-F



▲ DAF-M

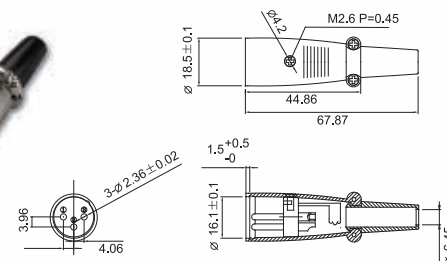


ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
DAF-(*)F	FEMALE, NICKEL PLATED	NICKEL	BLACK	3P-5P
DAF-(*)M	MALE, NICKEL PLATED	NICKEL	BLACK	3P-5P


DAH



▲ DAH-F

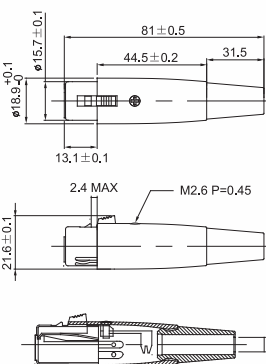

▲ DAH-M

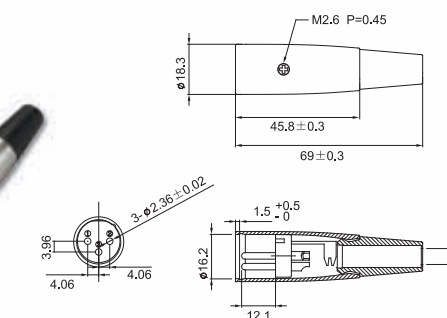

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
DAH-(*)F	FEMALE, NICKEL PLATED	NICKEL	BLACK	3P-5P
DAH-(*)M	MALE, NICKEL PLATED	NICKEL	BLACK	3P-5P