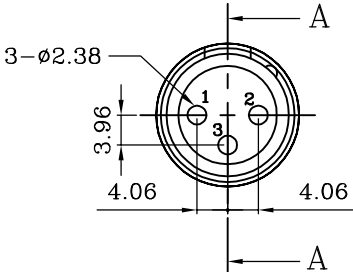
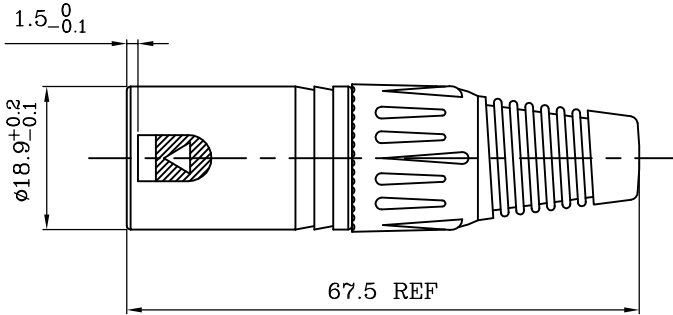
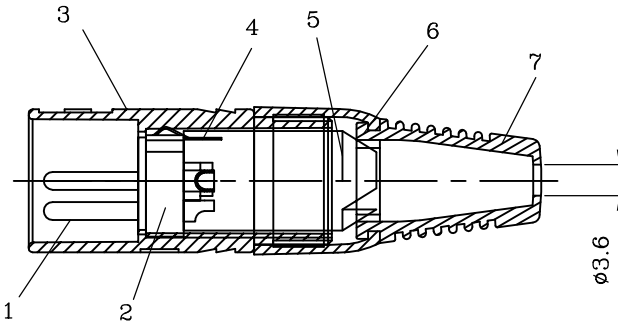


	1	2	3	4	5	6	7	8	9
A									
B									
C									
D	SPECIFICATIONS: CONTACT RESISTANCE—<3MΩ INSULATION RESISTANCE—>2GΩ DIELECTRIC STRENGTH—1500V/DC LIFE TIME(MATING CYCLES)>1000 註:PIN位置公差皆為±0.05								
E	   A—A SECTION								
F	7	DAN 橡膠尾套+尾殼/TPR+ABS耐衝擊	1						
	6	DAN尾套華司4-8MM用/ABS耐衝擊黑色	1						
	5	DAN-F/M 三葉夾線/POM	1						
	4	DAN 小端子/磷銅/鍍鎳	1						
	3	DAN公鋅管加工/鍍鎳&烤三分黑&鍍黑鉻	1						
	2	DAN-3M絕緣塑膠座	1						
	1	DAN-3M-052 銅心/碲銅/鍍金&鍍銀	3						
		DAN-3M-051 銅心/BRASS/鍍金&鍍鎳							
	Description	Qty.							

MODEL	3P XLR MALE CONNECTOR	 崧柏電子有限公司 SOUND PLUG ELECTRONIC CO.;LTD. Tel:886-6-3842328 Fax:886-6-3842356
TITLE		