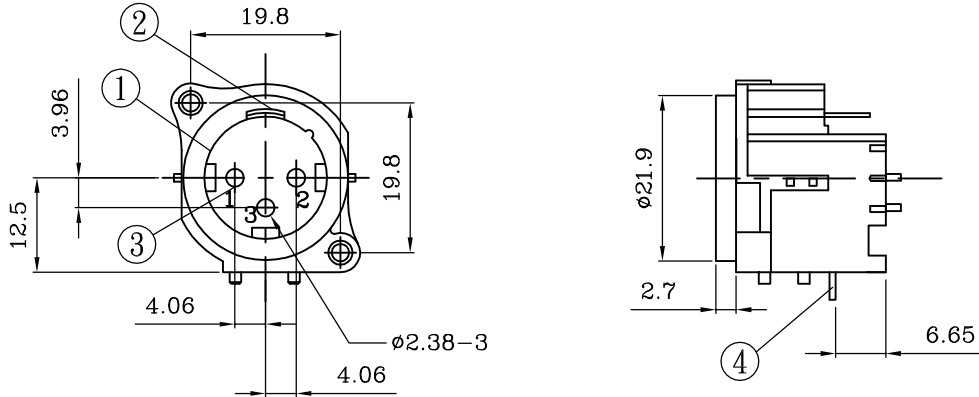


	1	2	3	4	5	6	7	8	9																					
A																														
B																														
C	 Wires Size:24AWG and 26 AWG																													
D																														
E	<table><tr><th colspan="3">Specification</th></tr><tr><td colspan="3">Contact resistance:<5mΩ</td></tr><tr><td colspan="3">Insulation resistance:1GΩ</td></tr><tr><td colspan="3">Delectric strength:1500Vdc</td></tr><tr><td colspan="3">Insertion/withdrawal force:<20N</td></tr><tr><td colspan="3">Life time(mating cycles):>1000</td></tr><tr><td colspan="3">Temperature range:−30℃ TO +80℃</td></tr></table>									Specification			Contact resistance:<5mΩ			Insulation resistance:1GΩ			Delectric strength:1500Vdc			Insertion/withdrawal force:<20N			Life time(mating cycles):>1000			Temperature range:−30℃ TO +80℃		
Specification																														
Contact resistance:<5mΩ																														
Insulation resistance:1GΩ																														
Delectric strength:1500Vdc																														
Insertion/withdrawal force:<20N																														
Life time(mating cycles):>1000																														
Temperature range:−30℃ TO +80℃																														
F	<table><tr><td>4</td><td>DAC-3MAH 接地片/銅/鍍鎳</td><td>1</td></tr><tr><td>3</td><td>DAC-3MAS焊接式/3號銅心/鍍金</td><td>3</td></tr><tr><td>2</td><td>固定片/鐵/鍍鎳</td><td>1</td></tr><tr><td>1</td><td>DAC-M塑膠外殼/PA6+15%短纖</td><td>1</td></tr><tr><td></td><td>Description</td><td>Qty.</td></tr></table>	4	DAC-3MAH 接地片/銅/鍍鎳	1	3	DAC-3MAS焊接式/3號銅心/鍍金	3	2	固定片/鐵/鍍鎳	1	1	DAC-M塑膠外殼/PA6+15%短纖	1		Description	Qty.	<table><tr><td>MODEL</td><td>DAC-3MAS/For Wires Type</td><td rowspan="2"> 崧柏電子有限公司 SOUND PLUG ELECTRONIC CO;LTD. Tel:886-6-3842328 Fax:886-6-3842356</td></tr><tr><td>TITLE</td><td>DAC-3P XLR Male Chassis Socket</td></tr></table>								MODEL	DAC-3MAS/For Wires Type	 崧柏電子有限公司 SOUND PLUG ELECTRONIC CO;LTD. Tel:886-6-3842328 Fax:886-6-3842356	TITLE	DAC-3P XLR Male Chassis Socket	
4	DAC-3MAH 接地片/銅/鍍鎳	1																												
3	DAC-3MAS焊接式/3號銅心/鍍金	3																												
2	固定片/鐵/鍍鎳	1																												
1	DAC-M塑膠外殼/PA6+15%短纖	1																												
	Description	Qty.																												
MODEL	DAC-3MAS/For Wires Type	 崧柏電子有限公司 SOUND PLUG ELECTRONIC CO;LTD. Tel:886-6-3842328 Fax:886-6-3842356																												
TITLE	DAC-3P XLR Male Chassis Socket																													