


TQ-FL

Mini XLR female connector, cable type, 3~6 pins.

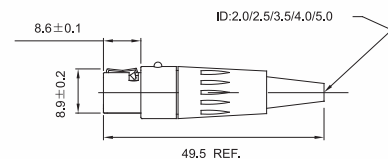


▲ TQ-FL

▲ TQ-BFL

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
TQ-(*)FL-A-(*)	FEMALE, NICKEL PLATED	GOLD	2.0MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)FL-B-(*)	FEMALE, NICKEL PLATED	GOLD	2.5MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)FL-C-(*)	FEMALE, NICKEL PLATED	GOLD	3.5MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)FL-D-(*)	FEMALE, NICKEL PLATED	GOLD	4.0MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)FL-E-(*)	FEMALE, NICKEL PLATED	GOLD	5.0MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)FL-F-(*)	FEMALE, NICKEL PLATED	GOLD	6.3MM ABS CAP W/O PVC BOOT	3P-6P
TQ-(*)BFL-(*)	FEMALE, BLACK CHROME PLATED	GOLD	2.0~6.3MM(BLACK, WHITE, SKIN)	3P-6P



★Able to mate with TQ-(*)MCS, TQ-(*)MP

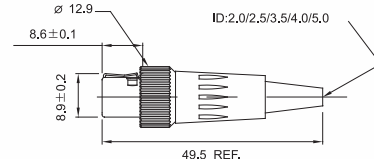


▲ TQ-FLS

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
TQ-(*)FLS	FEMALE, NICKEL PLATED /LOCK RING	GOLD	2.0~6.3MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)BFLS	FEMALE, BLACK CHROME PLATED /LOCK RING	GOLD	2.0~6.3MM(BLACK, WHITE, SKIN)	3P-6P



★Curved shell design allows easier access and better operation of push button.

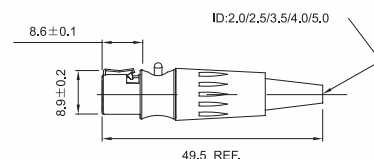

▲ TQ-FLCH


ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
TQ-(*)FLCH	FEMALE, NICKEL PLATED	GOLD	2.0~6.3MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)BFLCH	FEMALE, BLACK CHROME PLATED	GOLD	2.0~6.3MM(BLACK, WHITE, SKIN)	3P-6P

TQ-FC

- Uniquely designed female mounts save space for front or rear panel or chassis mounts.
- Separate ground lugs for each unit.




▲ TQ-FC

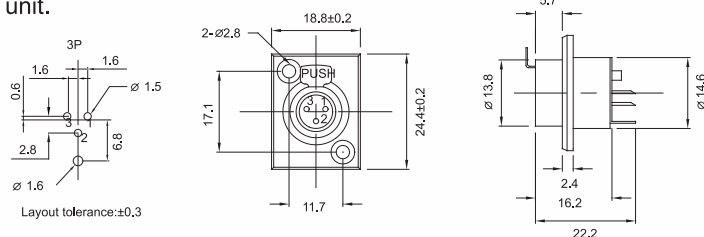

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TQ-(*)FC	FEMALE	NICKEL PLATED /PUSH LOCK	GOLD	3P-6P
TQ-(*)BFC	FEMALE	BLACK CHROME PLATED /PUSH LOCK	GOLD	3P-6P

TQ-ML

Mini XLR male connector, cable type, 3~6 pins.

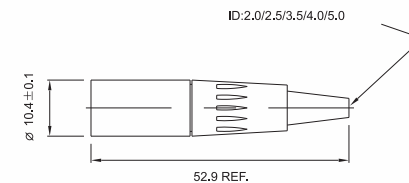

▲ TQ-ML

▲ TQ-BML

ITEM	SHELL	CONTACT	CAP	CONTACT Q'TY
TQ-(*)ML-A-(*)	MALE, NICKEL PLATED	GOLD	2.0MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)ML-B-(*)	MALE, NICKEL PLATED	GOLD	2.5MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)ML-C-(*)	MALE, NICKEL PLATED	GOLD	3.5MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)ML-D-(*)	MALE, NICKEL PLATED	GOLD	4.0MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)ML-E-(*)	MALE, NICKEL PLATED	GOLD	5.0MM(BLACK, WHITE, SKIN)	3P-6P
TQ-(*)ML-F-(*)	MALE, NICKEL PLATED	GOLD	6.3MM ABS CAP W/O PVC BOOT	3P-6P
TQ-(*)BML-(*)	MALE, BLACK CHROME PLTAED	GOLD	2.0~6.3 MM(BLACK, WHITE, SKIN)	3P-6P


TQ-MC

Specially designed flanges permit close mating of chassis/panel mounts on crowded panels.



▲ TQ-MC

▲ TQ-BMC

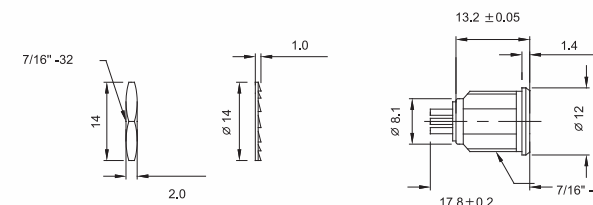

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TQ-(*)MC	MALE	NICKEL PLATED	GOLD	3P-6P
TQ-(*)BMC	MALE	BLACK CHROME PLATED	GOLD	3P-6P




▲ TQ-MCS

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TQ-(*)MCS	MALE	NICKEL PLATED	GOLD	3P-6P
TQ-(*)BMCS	MALE	BLACK CHROME PLATED	GOLD	3P-6P




▲ TQ-MP

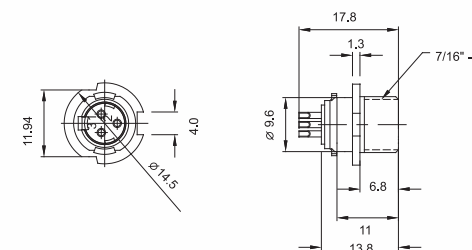

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TQ-(*)MP	MALE	NICKEL PLATED	GOLD	3P-6P
TQ-(*)BMP	MALE	BLACK CHROME PLATED	GOLD	3P-6P

TQ-MH


Right angle design opens more space on PC board. Separate ground lugs for each unit.

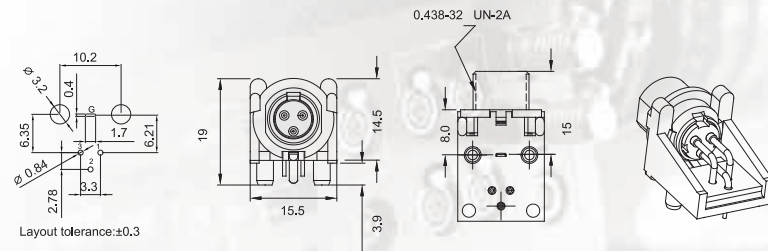

▲ TQ-MH

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TQ-(*)MH	MALE	NICKEL PLATED	GOLD/RIGHT ANGLE	3P-6P
TQ-(*)BMH	MALE	BLACK CHROME PLATED	GOLD/RIGHT ANGLE	3P-6P


TQ-FH

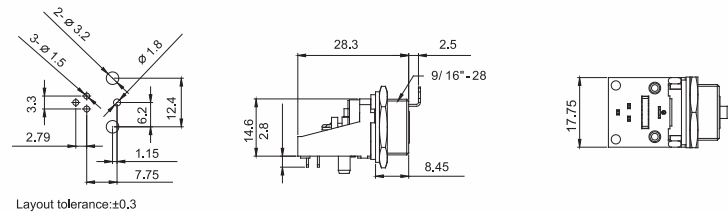

▲ TQ-FH

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TQ-(*)FH	FEMALE	NICKEL PLATED	GOLD/RIGHT ANGLE	3P-6P

TQ-FH-1

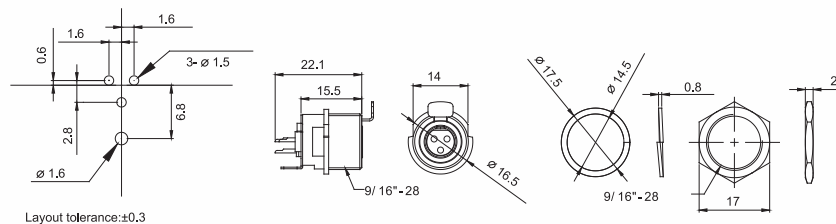

▲ TQ-FH-1

ITEM	TYPE	SHELL	CONTACT	CONTACT Q'TY
TO-(*FH-1	FEMALE	NICKEL PLATED	GOLD/RIGHT ANGLE	3P-6P

Mini XLR-TQ Electrical:

ITEM	3P /4P/5P	6P
Contact resistance	< 10m ohm	< 10m ohm
Insulation resistance	> 510M ohm (hi-temp.& moisture environment >100m ohm)	> 510M ohm (hi-temp. & moisture environment > 1g ohm)
Dielectric strength	1000 DCV	250DCV
Rated current	5A / 4A (5P)	1.5A
AWG	24AWG	28AWG

Mini XLR-TQ Mechanical:

ITEM	3P /4P/5P	6P
Lifetime/Insert & Withdraw	>5000 Cycles	>2000 Cycles
Insertion/Withdrawal Force	Insert 6.1 Lb /Withdraw 5.6 Lb Max.	≤13 Lb MAX.

Mini XLR-TQ Material

PART	TQ-FL, TQ-ML	TQ-BFL, TQ-BML	TQ-MC, MCS, MP, MH	TQ-BMC, BMCS, BMP, BMH
Part	Nickel Plated (3P-6P) F/M	Black Chrome Plated (3P/4P/5P/6P) F/M	Nickel Plated (3P-6P)Chassis	Black Chrome Plated (3P-6P) Chassis
Shell	Bronze/Nickel Plated	Bronze/Black Chrome Plated	Bronze/Nickel Plated	Bronze/Black Chrome Plated
Insert	P.P.S-Black	P.P.S-Black	P.P.S-Black	P.P.S-Black
Contact	Female: Bronze-C5210P Male: Brass-C3604	Female: Bronze-C5210P Male: Brass-C3604	Female:Bronze-C5210P Male:Brass-C3604	Female:Bronze-C5210P Male:Brass-C3604
Contact surface	Silver/Gold Plated	Silver/Gold Plated	Silver/Gold Plated	Silver/Gold Plated
Spring lock	Female: SUS-301+ A.B.S Black	Female: SUS-301+ A.B.S Black	N/A	N/A
Relief clamp	P.P.S+ Bronze /Nickel Plated	P.P.S+ Bronze/Nickel Plated	N/A	N/A
Antikink bushing	A.B.S+PU-Black	A.B.S+PU-Black	N/A	N/A

