

Ø 6.3 PLUG TO Ø3.5 JACK---INLINE ADAPTER



▲ MA63M-J35M

▲ MA63M-J35S


▲ MA63S-J35S

▲ MA63S-J35SJ

ITEM	PLUG	JACK	SHELL
MA63M-J35M	6.3 MONO PLUG	3.5 MONO JACK	PLASTIC
MA63M-J35S	6.3 MONO PLUG	3.5 STEREO JACK	PLASTIC
MA63S-J35S	6.3 STEREO PLUG	3.5 STEREO JACK	PLASTIC
MA63S-J35SJ	6.3 STEREO PLUG	3.5 STEREO JACK	N/A

TRANSFORMER

Available options to suit your project needs



▲ MT-260-32

▲ MT-FXMP-100

▲ MT-600-20

ITEM	SPECIFICATION	COLOR
MT-260-32	260:32K	YELLOW
MT-FXMP-100	260:32.5K	BLUE
MT-600-20	600:20K	GREEN

HDMI

Providing the best interconnect solutions for HDMI



▲ HDMI-1

▲ HDMI-2

ITEM	MATERIAL	COLOR
HDMI-1	JACK	BLACK
HDMI-2	PLUG	BLACK

CONNECTOR--CB SERIES

The best choice for communications connectors.

Product Introduction:

Suitable for broadcast and communication equipment. Its 2-8 pin contacts increase the adaptability of your product. It also has superb insulation for high voltage output and the lock ring design provides connectivity and stability of audio signal transfer.


ORDER CODE:

CB	(Contact)	(Type)
PIN Q'TY		MALE/FEMALE STYLE F:FEMALE M:MALE

EX. CB-3FL

3 PIN FEMALE CONNECTOR

CB-FL

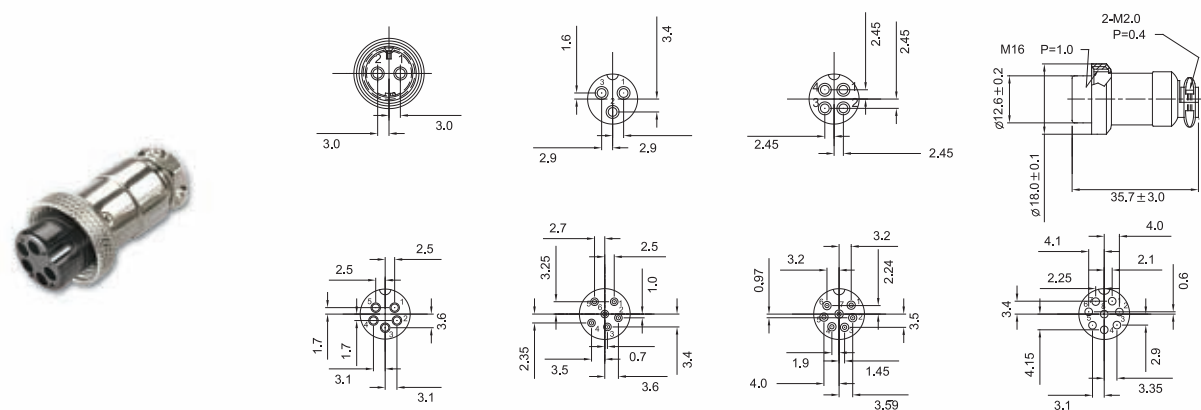

▲CB-FL

ITEM	SHELL	CONTACT	CONTACT Q'TY
CB-(*)FL	FEMALE, NICKEL PLATED, WIRE TYPE	NICKEL	2P-8P

CBL-FL



▲CBL-FL

ITEM	SHELL	CONTACT	CONTACT Q'TY
CBL-(*)FL	FEMALE, NICKEL PLATED, RIGHT ANGLE	NICKEL	2P-8P
CB-(*)FLGS	FEMALE, BLACK CHROME PLATED	NICKEL	2P-8P
CB-(*)FL-T	FEMALE, BLACK CHROME PLATED/MOLDING	NICKEL	2P-8P

CB-FLGS




▲CB-FLGS

CB-FL-T



▲CB-FL-T


CB-ML

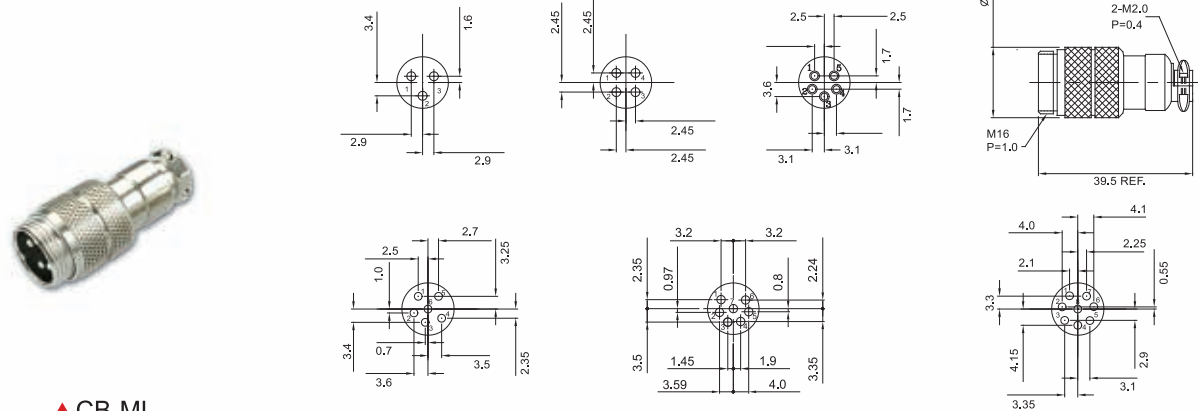

▲CB-ML

ITEM	SHELL	CONTACT	CONTACT Q'TY
CB-(*)ML	FEMALE, NICKEL PLATED, WIRE TYPE	NICKEL	2P-8P

CB-MC

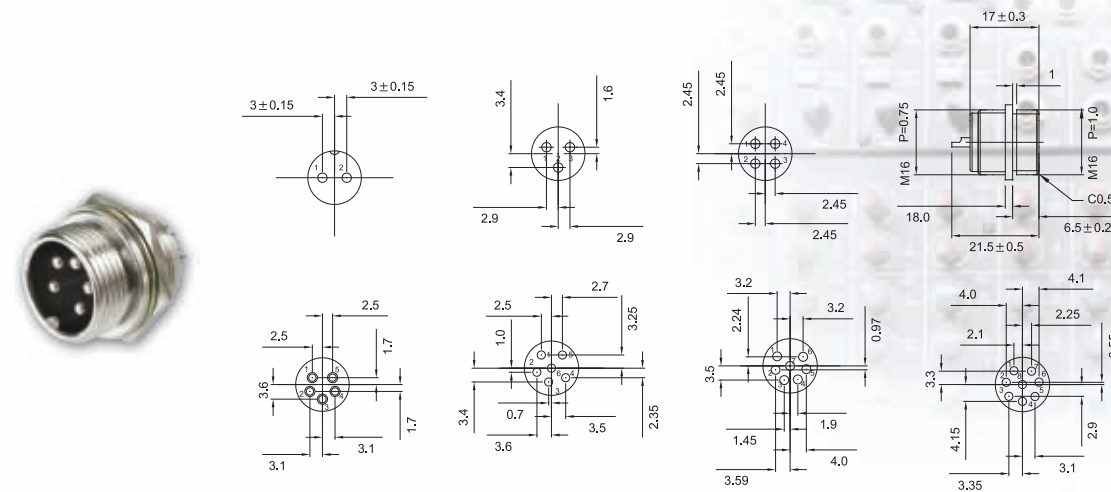

▲CB-MC

ITEM	SHELL	CONTACT	CONTACT Q'TY
CB-(*)MC	MALE, NICKEL PLATED, PANEL TYPE	NICKEL	2P-8P
CB-(*)BMC	MALE, BLACK CHROME PLATED, PANEL TYPE	NICKEL	2P-8P

CB Electrical

ITEM	CB-F/M	CB-MC
Contact Resistance	< 50m Ohm	< 50m Ohm
Insulation Resistance	> 10G Ohm	> 10G Ohm
Dielectric Strength	5000 DCV(2P-4P)/1000 DCV(5P-8P)	5000 DCV(2P-4P)/1000 DCV(5P-8P)
Rated Current	15A / 10A / 5A	15A / 10A / 5A
Awg (For Solder Type)	2P-4P:14 AWG 5P:16 AWG 6P-8P:18 AWG	2P-4P:14 AWG 5P:16 AWG 6P-8P:18 AWG

CB Mechanical

ITEM	CB-F/M	CB-MC
Lifetime	>1000 Cycles Min.	>1000 Cycles Min.
Insertion/Withdrawal Force	2 Lb (Nominal)	2 Lb (Nominal)

CB Material

PAR	CB-FL	CB-ML	CB-MC
Shell	Zinc+Bronze/Nickel Plated	Zinc+Bronze/Nickel Plated	Zinc/Nickel Plated
Insert	Backlit/Black	Backlit/Black	Backlit/Black
Contact	Bronze-C5210P/Nickel Plated	Male:Brass-C3604/ Nickel Plated	Male:Brass-C3604/ Nickel Plated
Contact Surface	Nickel Plated	Nickel Plated	Nickel Plated
Ring Lock & Nut	Brass/Nickel Plated	N/A	M16 P=0.75 Nut/Brass Nickel Plated